

Specifications

Nominal Voltage		6 V
Capacity (25°C)	20HR(5.25V)	6Ah
	10HR(5.25V)	5.6Ah
	1HR(4.80V)	3.9Ah
Dimension	Length	70 ± 1mm (2.76inch)
	Width	47 ± 1mm (1.85inch)
	Height	101 ± 1mm (3.98inch)
	Total Height	107 ± 1mm (4.21inch)
Approx. Weight		0.93kg (2.05lbs) ± 5%
Terminal type		T1
Internal resistance (Fully charged, 25°C)		Approx. 12mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		6.80 to 6.90V Temperature compensation: -9mV/°C
Cyclic charging voltage(25°C)		7.25 to 7.45V Temperature compensation: -15mV/°C
Maximum charging current		1.8A
Terminal material		Copper
Maximum discharge current		90A(5 sec.)
Designed floating life(20°C)		3~5 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)



F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	22.8	14.4	11.4	6.36	3.90	2.13	1.53	1.22	1.04	0.57	0.30
4.95V	22.1	14.0	11.1	6.23	3.84	2.12	1.52	1.22	1.03	0.56	0.30
5.10V	21.2	13.4	10.7	6.04	3.74	2.10	1.51	1.21	1.03	0.56	0.30
5.25V	20.3	12.8	10.4	5.90	3.67	2.07	1.50	1.20	1.02	0.56	0.30
5.40V	19.2	12.1	9.80	5.68	3.56	2.02	1.46	1.16	0.99	0.55	0.29

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	127	81.2	65.0	36.4	22.6	12.5	9.09	7.29	6.21	3.40	1.83
4.95V	123	78.8	63.4	35.7	22.2	12.4	9.03	7.25	6.17	3.38	1.82
5.10V	118	75.5	61.1	34.6	21.7	12.3	8.97	7.20	6.13	3.37	1.81
5.25V	113	72.3	59.0	33.8	21.2	12.1	8.91	7.15	6.09	3.35	1.80
5.40V	107	68.2	55.9	32.5	20.6	11.8	8.64	6.93	5.91	3.28	1.76

Note: The above characteristics data can be obtained within three charge/discharge cycles.

Dimensions


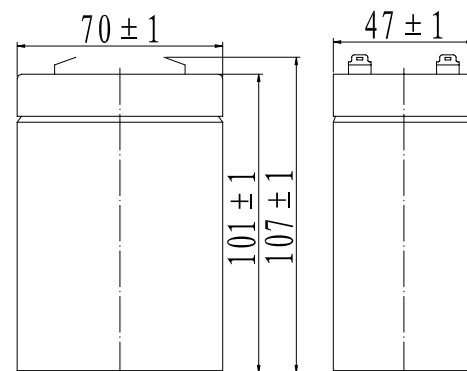


Terminal




Terminal T1


Discharge Characteristics(25°C)

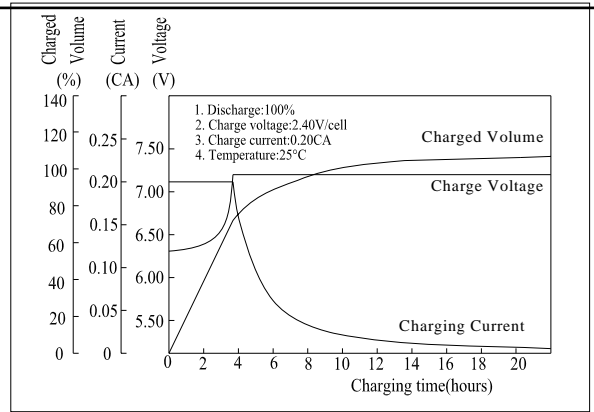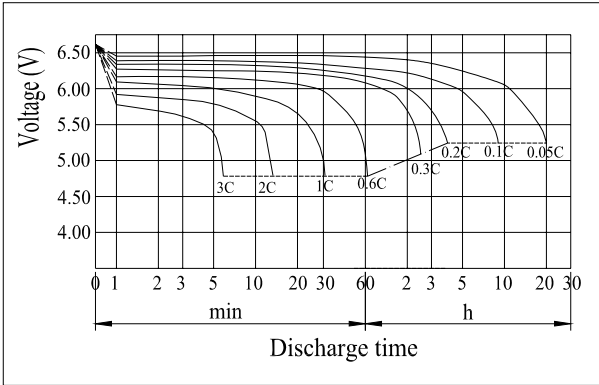


Effect of Temperature on Capacity

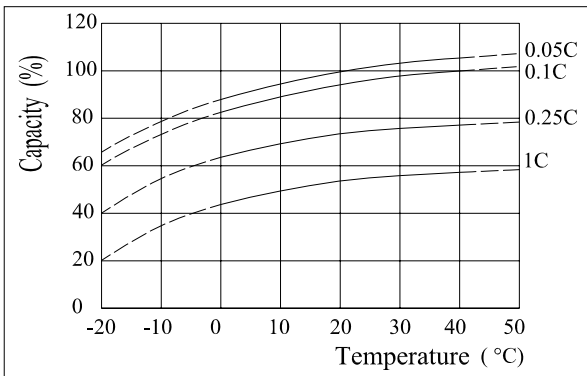


Self-discharge Characteristics

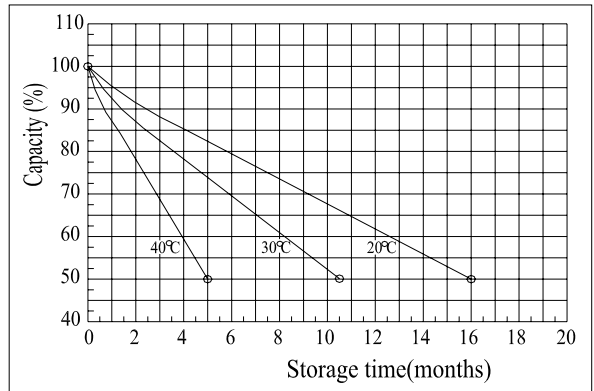


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

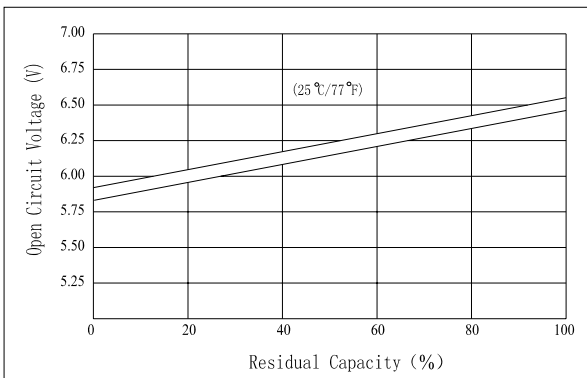


The Relationship for Charging Voltage and Temperature

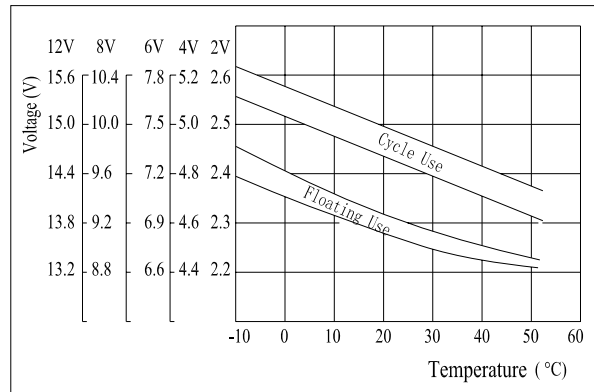

Floating Life on Temperature

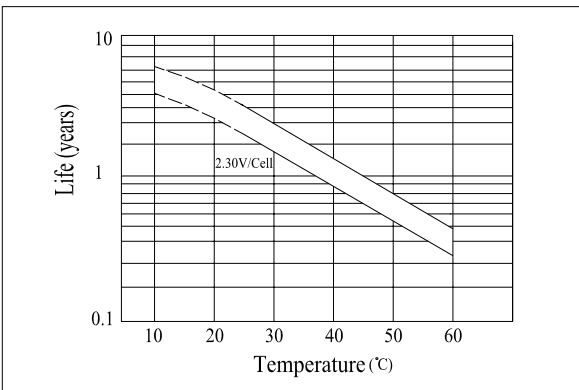

Cycle Life on D.O.D(25°C)

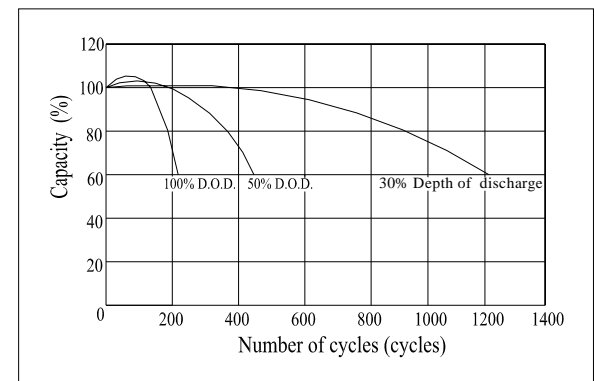

Charging Characteristics(25°C)